
# BASE SERIES FRESTANDING FREEBLES



### ecosmar+<sup>™</sup> Fire



Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. MAD Design Group (MDG), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "MAD Design Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. MDG disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum edent permitted by law. The product specifications do not expand or otherwise modify MDG's terms and conditions of purchase, including but not limited to the warranty expressed frerini, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellicutal property rights is granted by this document or by any conduct of MDG. Customers using or selling MDE products net expressive indicated for use in such applications do so entirely at their own risk and agree to fully indemnify MDG for any damages arising or resulting from such use or sale. Please contact authorised personnel from MDG to obtain written terms and conditions regarding products designed for such applications. Images are indicative only.

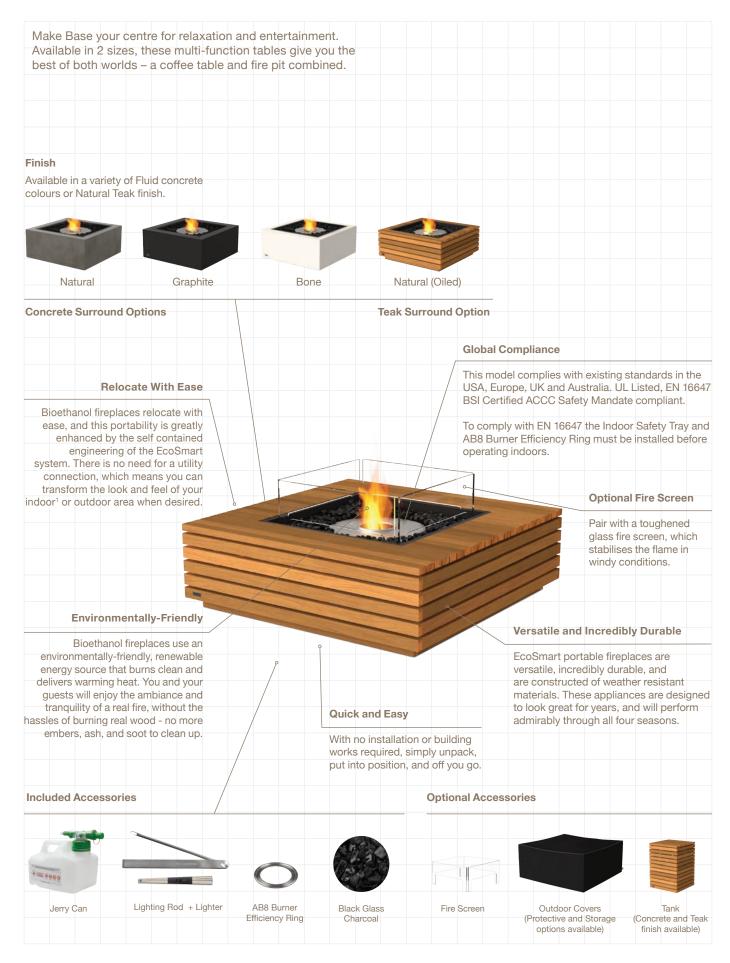

## Base 40



Outdoor and Indoor <sup>1</sup>		
Fluid Concrete or Teak, Grade 304 Stainless Steel Burner		
Concrete 79.4kg [174.7lbs] Teak 56.8kg [125lbs] Weight includes burner and black glass charcoal.		
Natural Bone Graphite	ESF.5.O.BAS.40.NA ESF.5.O.BAS.40.BO ESF.5.O.BAS.40.GH	
Natural (Oiled)	ESF.5.O.BAS.40.TN	
	Fluid Concrete or Grade 304 Stainle Concrete 79.4kg [ Teak 56.8kg [125l] Weight includes burner Natural Bone Graphite	

#### **BURNER INFORMATION\***

AB8 Burner	Without Efficiency Ring	With Efficiency Ring (EN Compliant)			
Heats on Average (when used indoors)	Over 60m <sup>2</sup> [645f <sup>2</sup> ]	n <sup>2</sup> Over 30m <sup>2</sup> [322.9f <sup>2</sup> ]			
Burn Time (approx)	7 - 11 hours	9 - 11 hours			
Fuel Type	e-NRG Bioethanol				
Fuel Capacity	8 Litres [2.1 Gallons]				
Minimum Room Size	116 cubic metres [4096 cubic feet] per fireplace.				

\*These values are indicative only and may vary depending on the model purchased, installation, and the seasonal resource used to manufacture e-NRG.

This model comes with fixing brackets for permanently locating into a fixed position. <sup>1</sup>For Indoor Use, additional parts are required. Your chosen application is the ONLY application the model can be used in due to modified configuration of the model. Please advise your Sales Representative at time of purchase so that the product can be configured accordingly.

#### Global Compliance

This model complies with existing standards in the USA, Europe, UK and Australia. UL Listed, EN 16647 BSI Certified ACCC Safety Mandate compliant. 'To comply with EN 16647 the Indoor Safety Tray and included Burner Efficiency Ring must be installed before operating indoors.

Line drawings show the optional Fire Screen accessory.

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. MAD Design Group (MDG), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "MAD Design Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. MDG disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify MDGs terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of MDG. Customers using or applications. Images are indicative only.

TOP VIEW (Concrete)

[19.1] 486

[39.4] 1000 [24.7] 627

FRONT VIEW (Concrete) [13.3] 339

#### www.ecosmartfire.com

[20.9] 530

[39.4] 1000 [24.7] 627



## Base 30



Application	Outdoor and Indoor <sup>1</sup>		
Materials	Fluid Concrete or Teak, Grade 304 Stainless Steel Burner		
Weight (approx)	Concrete 62.1kg [136.7lbs] Teak 43.8 kg [96.4lbs] Weight includes burner and black glass charcoal.		
Concrete SKU's	Natural Bone	ESF.5.O.BAS.30.NA ESF.5.O.BAS.30.BO	
Teak SKU	Graphite Matural (Oiled)	ESF.5.O.BAS.30.GH ESF.5.O.BAS.30.TN	

#### **BURNER INFORMATION\***

AB8 Burner	Without Efficiency Ring	With Efficiency Ring (EN Compliant)	
Heats on Average (when used indoors)	Over 60m <sup>2</sup> [645f <sup>2</sup> ]	Over 30m <sup>2</sup> [322.9f <sup>2</sup> ]	
Burn Time (approx)	7 - 11 hours	9 - 11 hours	
Fuel Type	e-NRG Bioethanol		
Fuel Capacity	8 Litres [2.1 Gallons]		
Minimum Room Size	116 cubic metres [4096 cubic feet] per fireplace.		

\*These values are indicative only and may vary depending on the model purchased, installation, and the seasonal resource used to manufacture e-NRG.

This model comes with fixing brackets for permanently locating into a fixed position. <sup>1</sup>For Indoor Use, additional parts are required. Your chosen application is the ONLY application the model can be used in due to modified configuration of the model. Please advise your Sales Representative at time of purchase so that the product can be configured accordingly.

#### Global Compliance

This model complies with existing standards in the USA, Europe, UK and Australia. UL Listed, EN 16647 BSI Certified ACCC Safety Mandate compliant. To comply with EN 16647 the Indoor Safety Tray and included Burner Efficiency Ring must be installed before operating indoors.

Line drawings show the optional Fire Screen accessory.

FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. MAD Design Group (MDG), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "MAD Design Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. MDG disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify MDGs terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of MDG. Customers using or applications. Images are indicative only.

TOP VIEW

(Concrete)

[19.1] 486

[30.6] 776 [24.7] 627

FRONT VIEW (Concrete) [13.3] 339

.ecosm	

[20.9] 530

[30.6] 776 [24.7] 627