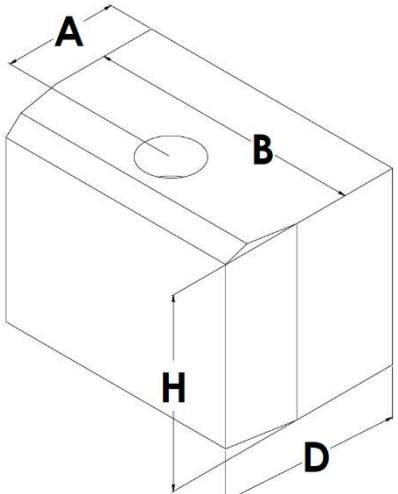


|   |   |
|---|---|
| Model   | Heta Vista Frameless                                |
| Measurements mm   | A: 290/306(30°)<br>B: 694<br>C:<br>D: 450<br>H: 489 |
|  |   |
| Floor to top outlet mm  |   |
| Energy efficiency class   | <b>A<sup>+</sup></b>                                |
| Color   | sort / grå  |
| Nominal kW  | 7   |
| Heat output kW  | 3-10  |
| Est. room size m <sup>2</sup>   | 30-130  |
| Outlet pip size Ø mm  | 150   |
| Weight kg   | 103   |
| Fuel volume kg  | 1,76  |
| Combustion chamber width mm   | 544   |
| Min. draught mbar   | 0,11  |
| Distance to flammable materials mm  |   |
| At the sides  | 110   |
| Behind stove  | 150   |
| Place at 45° in a corner  |   |
| Distance to furniture   | 1100  |
| CO % / mg / m <sup>3</sup> <sub>n</sub> 13% O <sub>2</sub>                        | 0,0573 / 716  |
| Efficiency %  | 81  |
| Dustmeasurement NS3058 g/kg   |   |
| Dustmeasurement EN13240 g/kg  | 14  |
| Flu / gas g/sec   | 6   |
| Flu / gas temperature C°  | 265   |
| NOx mg / m <sup>3</sup> <sub>n</sub> 13% O <sub>2</sub>                           | 87  |
| Approvals   | EN 13229  |